

DIGIDRIVE SK



Simply ready...

DIGIDRIVE SK

Open loop vector drive - IP20

SIMPLE

- 1 FIT**
DIN rail mounting up to 1.8 kW
on 4 x screws pre-installed
- 2 CONNECT**
Push type connectors, easy access,
marked terminals
- 3 START**
Default optimised factory configuration
most parameters listed on drive cover



SMART STICK
Dow-load adapted
parameter settings

IP 55 remote key-pad up to 30 m

- LED with function keys and local command
- LCD with 3 line display and help key




EMC compliant to EN61000-6-3, EN61000-6-4 & IEC 61800-3
Built-in filter (can be disconnected)



COMPACT

Dimensions (mm)

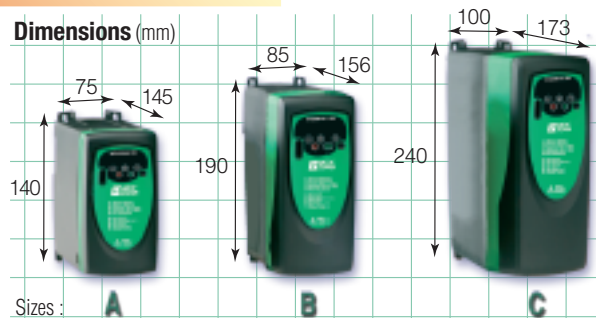


General data

Power supply 48-62 Hz

Phases	Voltage (V) $\pm 10\%$	Power range (kW)		
		A	B	C
1	200-240	0,25 - 0,75	1,1 - 1,5	2,2
3	200-240		1,1 - 1,5	2,2
3	380-480		0,37 - 1,5	2,2 - 4

PERFORMANCE, ECONOMY : the Trump Card ...

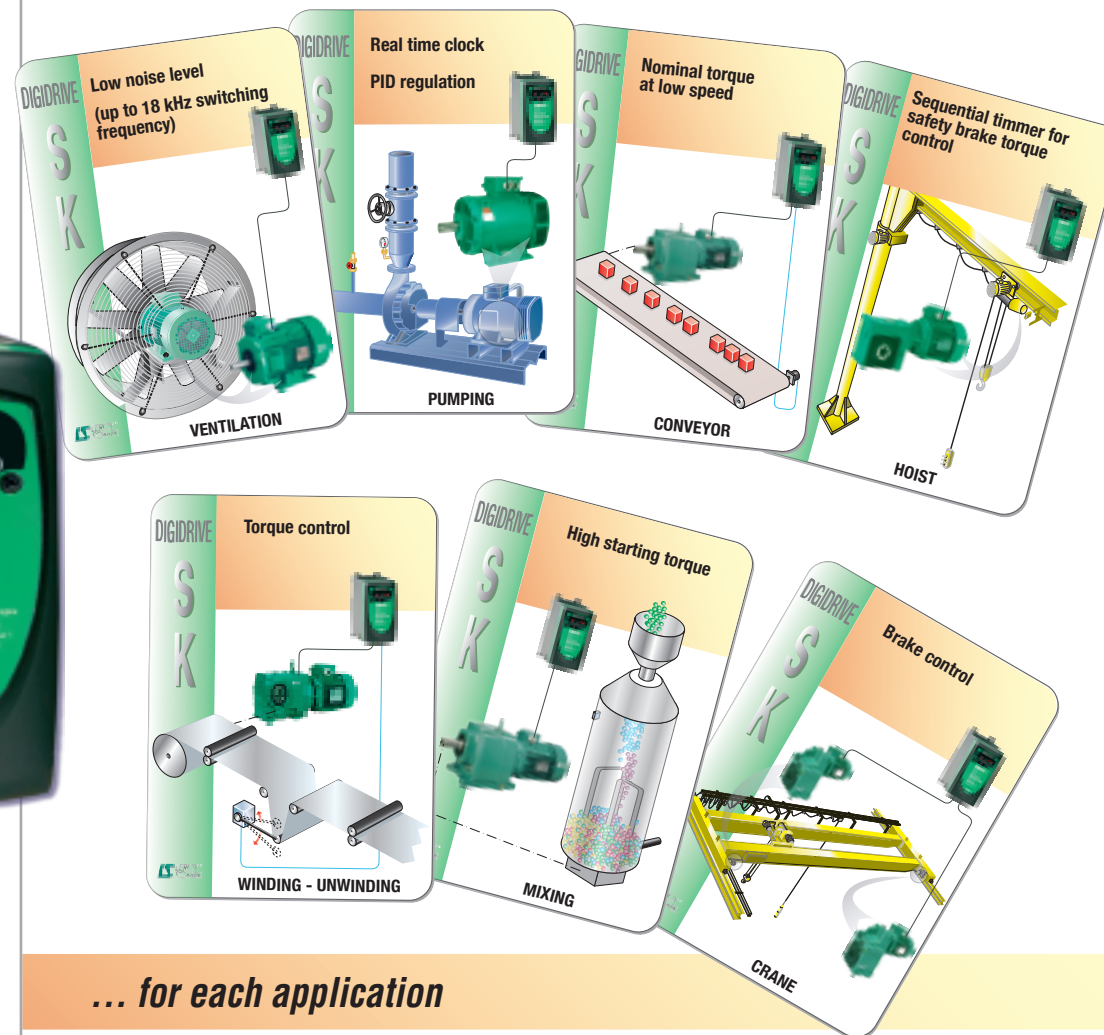

... for each application

Control mode

- Up to 8 digital I/O
- Up to 5 analog I/O, (0-10V, 10V, 4-20mA, 0-20mA ...)
- 2 relay output NO, 240VAC - 30VDC
- Field-Bus

